


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 34 TOWNSHIP 17 RANGE 3  
DATE: ~~--10-11-99--~~ 10-14-04  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County 6-28-95

IN. S.P.C. E ZONE, NAD 83  
NAME: 17033405  
N: 513832.0498(m)  
E: 56557.1480(m)

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS.

Line of 65th Street 6500 N

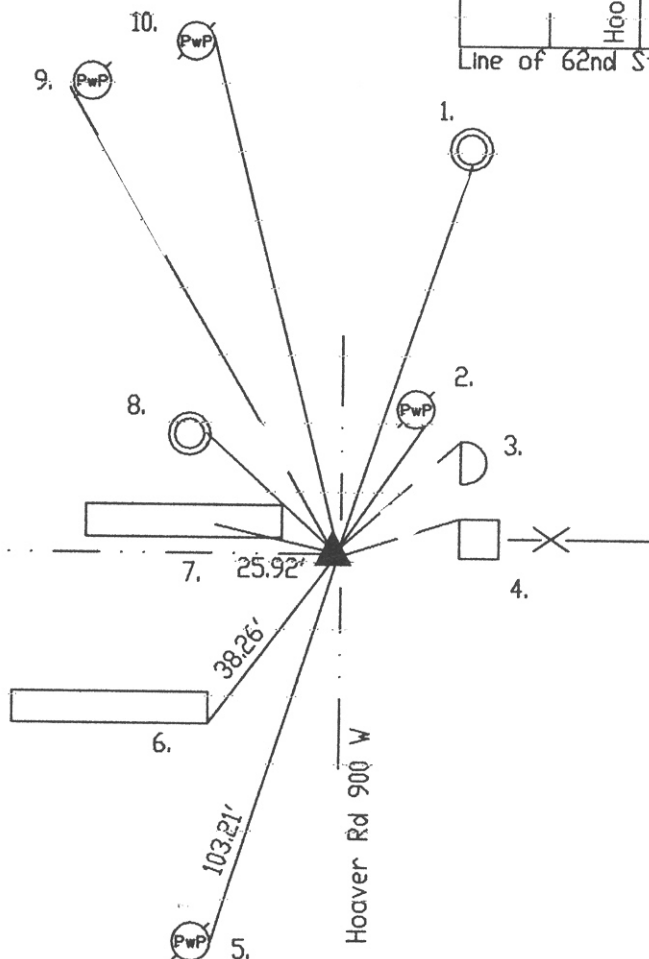

Survey by Hosbrook 1850 called no stone but witnesses: 15' tree N 59 3/4 W 31 links, 12' walnut S 20 1/4 W 89 links per Washington Township Legal Survey Book pg. 8. McLand 2-22-71 called stone 19' down. Wilcoxon 1-6-76 called a PK nail. Excavated by Wilcoxon 6-28-95 and PK nail found at surface. 5/8" rebar found 10' down. Stone found 20' down. PK nail was 0.22' S and 0.16' W of the stone. Rebar was 0.38' E and 0.02' S of the stone. Set Harrison in place of stone. Re-tied 10-11-99 by Wilcoxon.

HC733405

REF.	DISTANCE	DESCRIPTION
1.	<del>95.33'</del>	<del>Cut 'x' S edge of sewer manhole</del>
2.	23.52'	Mag nail w/brass washer SE PwP no# 15'up
3.	<del>31.35'</del>	<del>NW corner of inlet</del>
4.	25.46'	PK nail N fence post 12'up
5.	103.21'	PK nail E PwP#82-304A 15'up
6.	38.26'	SE corner of concrete headwall
7.	25.92'	Cut 'x' in middle on concrete headwall
8.	<del>34.13'</del>	<del>Cut 'x' E edge of telephone manhole</del>
9.	127.33'	PK nail W PwP#30-264B 12'up
10.	120.41'	PK nail E PwP#31-264B 15'up